

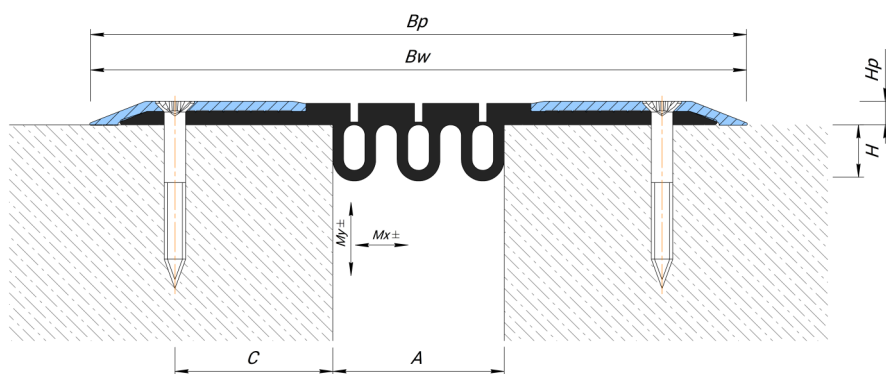


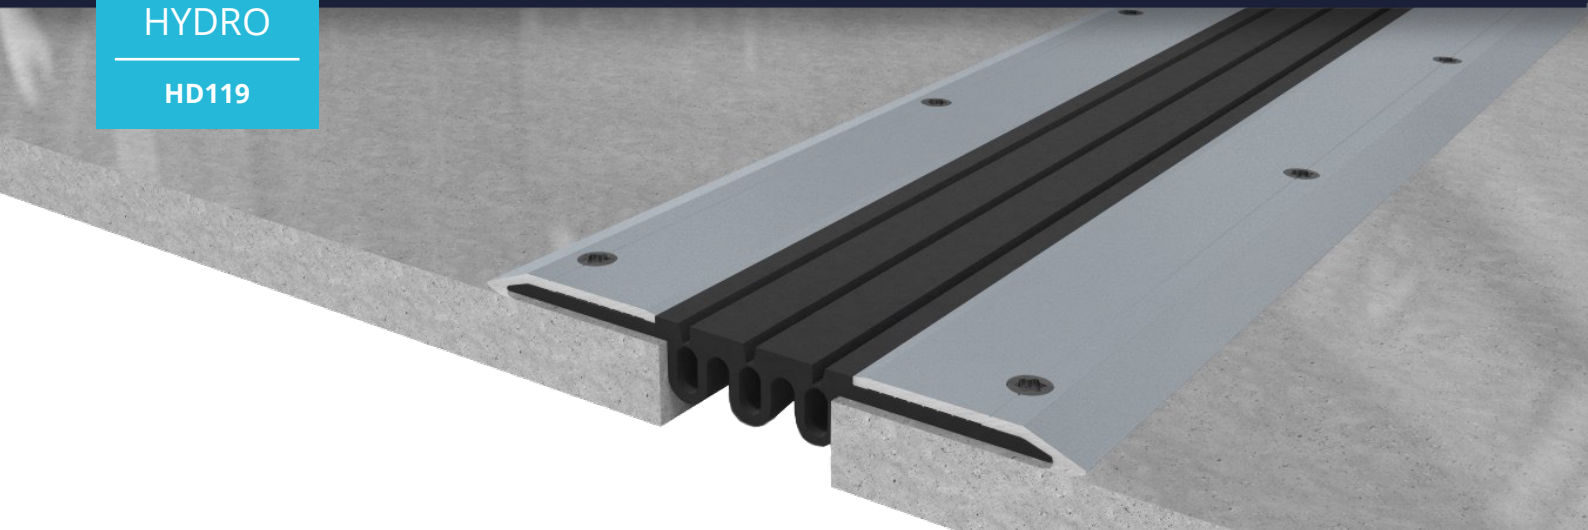

HYDRO

HD119

Šířka profilu  
70 mmPovrchová  
montážMaximální zatížení  
300 kNPohyb v  
6 směrechStupeň ochrany  
IP 66Interiér/  
exteriér

## Technická data

### Materiál

Profil: hliník EN AW 6060T6  
Vložky: PVC-P

### Délka

Profil: 2,5 m  
Vložky: 20 m

### Standardní barva vložky (RAL)

9005

Profil	A (mm)	Bw (mm)	Bp (mm)	C (mm)	H (mm)	Hp (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
HD119-100 <sup>1</sup>	70	238	238	50	20	8	40 (+20/-20)	20 (+10/-10)	50	300	70	—
HD119-101 <sup>2</sup>	70	238	238	50	20	8	40 (+20/-20)	20 (+10/-10)	50	300	70	—
HD119-102 <sup>3</sup>	70	238	238	50	20	8	40 (+20/-20)	20 (+10/-10)	50	300	70	—

## Varianta profilu

Upínací desky mohou být vyrobeny ze tří typů materiálů:

- Index<sup>1</sup> Hliník;
- Index<sup>2</sup> Lakovaná černá ocel S2354;
- Index<sup>3</sup> Nerezová ocel AISI 430  
(ocel AISI 304 nebo 316 lze použít na vyžádání).

## Rohová varianta

Všechny profily mají rohovou variantu, ve kterých je běžná vložka nahrazena rohovou. Při objednávce doplňte znak -E (příklad HD119-100-E)

