




MASIVNÍ

MD104



Šířka profilu
20-100 mm



Zapuštěná
montáž



Maximální zatížení
100 kN





Pohyb v
1 směru



Stupeň ochrany
IP30



Interiér/
exteriér

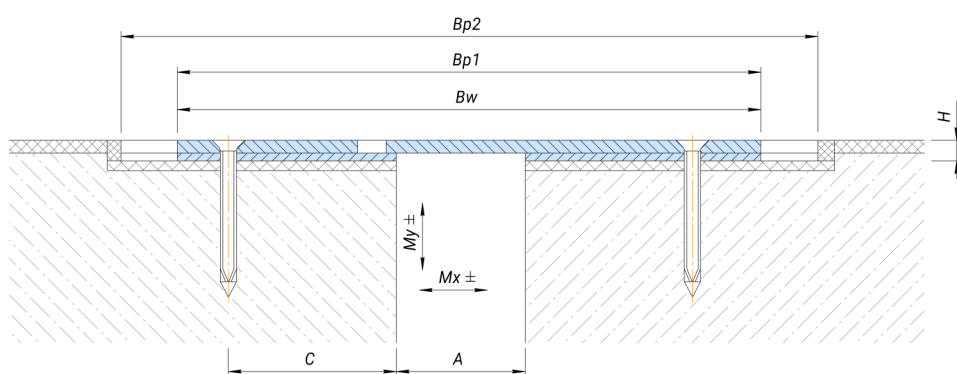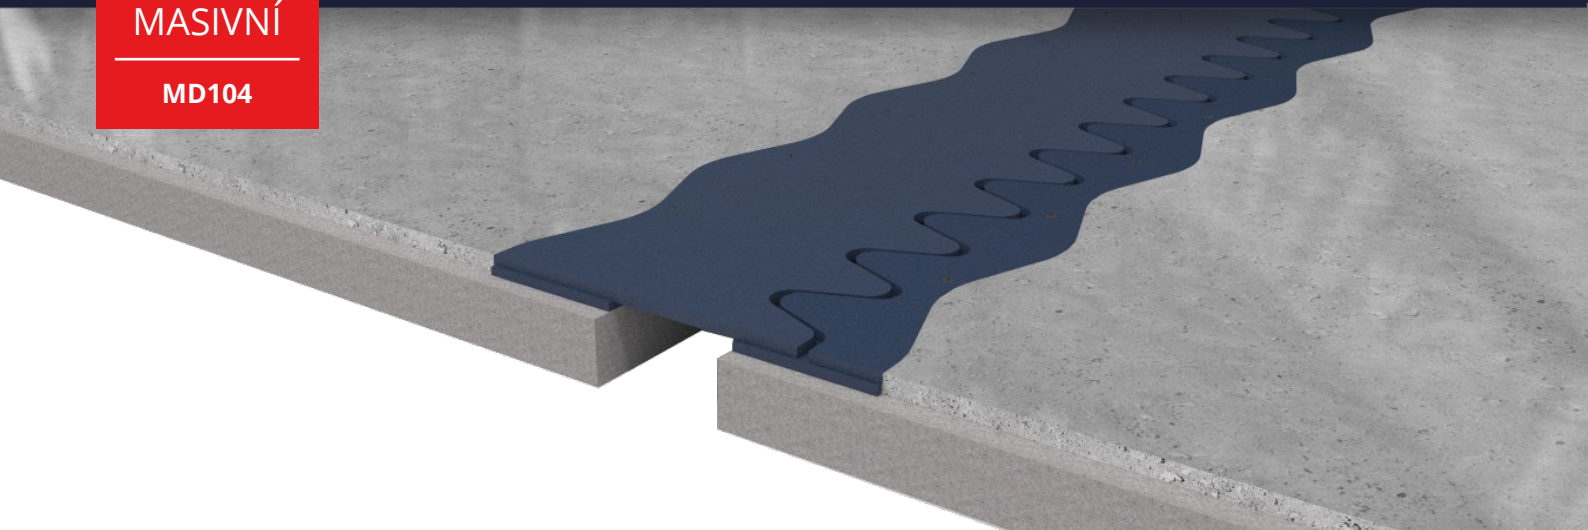

Technická data

Materiál

Ocel S235

Délka

2,48 m

Standardní barva (RAL)

7035

Profil	A (mm)	H (mm)	Bw (mm)	Bp1 (mm)	Bp2 (mm)	C (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
MD104-100	20	6	190	190	220	65	20 (+10/-10)	-	50	100	50	20
MD104-101	30	6	200	200	230	65	20 (+10/-10)	-	50	100	50	20
MD104-102	50	7	220	220	250	65	20 (+10/-10)	-	50	100	50	20
MD104-103	80	8	250	250	280	65	20 (+10/-10)	-	50	100	50	20
MD104-104	100	9	280	280	310	70	20 (+10/-10)	-	50	100	50	20

Na vyžádání

Hodnoty pohybů mohou být různé.

Jakékoliv zbarvení podle katalogu RAL.

Délka profilu může být změněna dohodou.

Výroba profilu vcelku nebo zčásti z nerezové oceli.

Věnujte pozornost

Svislé pohyby nejsou povoleny.

Montáž profilu

Sada obsahuje vysokopevnostní šrouby pro beton.