


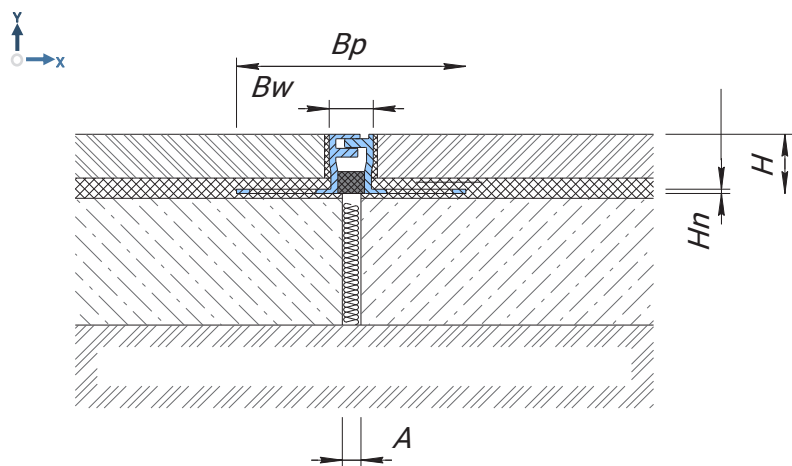

STANDARD

ST131

Zapuštěná  
montážPohyb v  
3 směrechStupeň ochrany  
IP 30

### Technická data

Materiál

Hliník EN AW 6060T6

Délka

3 m

Standardní barva (RAL)

stříbrně bílá

Profil	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
ST131-100	6	10	10	10	9	4 (+2/-2)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST131-101	6	10	10	13,5	12,5	4 (+2/-2)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST131-102	6	10	10	20	19	4 (+2/-2)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST131-103	6	10	10	25	23,5	4 (+2/-2)	2 (+1/-1)	jakákoliv <sup>1</sup>			

<sup>1</sup> Jakákoliv zatížení povolené na podlahu.