


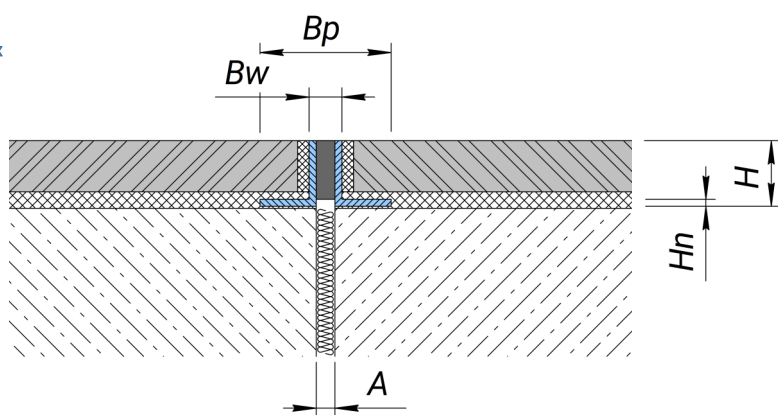

STANDARD

ST132

Zapuštěná  
montážPohyb v  
3 směrechStupeň ochrany  
IP 42

## Technická data

### Materiál

Profil: Hliník EN AW 6060T6 nebo nerez  
(na vyžádání)

Vložka: PVC-P

### Délka

3 m

### Standardní barva vložek (RAL)

9005

7035

Profil	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
ST132-100 <sup>AL</sup>	5	8	29	10	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-101 <sup>AL</sup>	5	8	35	12	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-102 <sup>AL</sup>	5	8	35	15	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-103 <sup>AL</sup>	5	8	35	20	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-104 <sup>AL</sup>	5	8	35	25	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-105 <sup>AL</sup>	5	8	25	30	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-106 <sup>SS</sup>	5	8	29	10	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-107 <sup>SS</sup>	5	8	35	12	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-108 <sup>SS</sup>	5	8	35	15	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-109 <sup>SS</sup>	5	8	35	20	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-110 <sup>SS</sup>	5	8	35	25	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			
ST132-111 <sup>SS</sup>	5	8	35	30	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv <sup>1</sup>			

<sup>1</sup> Jakékoliv zatížení povoleno na podlahu.

Materiál profilů:

<sup>AL</sup> Hliník<sup>SS</sup> Nerezová ocel