


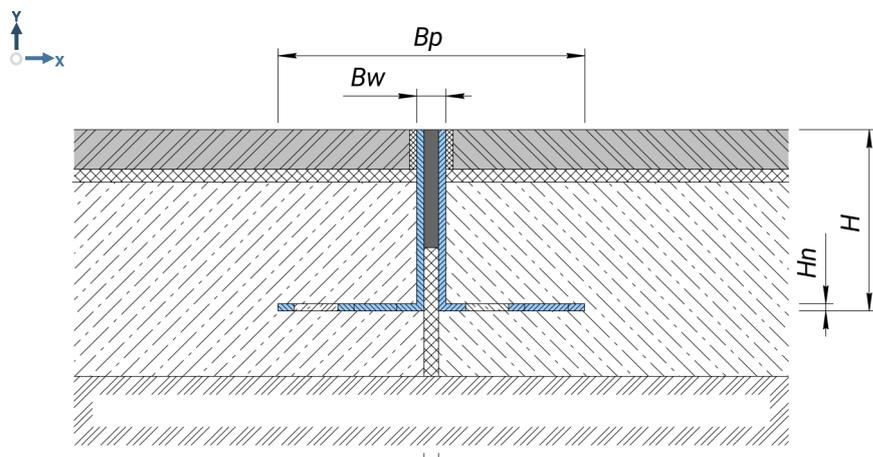

STANDARD

ST133

Zapuštěná
montážPohyb v
3 směrechStupeň ochrany
IP 30

Technická data

Materiál

Profil: Hliník EN AW 6060T6 nebo nerez
(na vyžádání)

Vložka: PVC-P

Délka

3 m

Standardní barva vložek (RAL)

9005

7035

Profil	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
ST133-100 ^{AL}	5	9	85	20	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-101 ^{AL}	5	9	85	25	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-102 ^{AL}	5	9	85	30	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-103 ^{AL}	5	9	85	40	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-104 ^{AL}	5	9	85	50	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-105 ^{AL}	5	9	85	60	2	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-106 ^{SS}	5	8	85	20	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-107 ^{SS}	5	8	85	25	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-108 ^{SS}	5	8	85	30	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-109 ^{SS}	5	8	85	40	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-110 ^{SS}	5	8	85	50	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			
ST133-111 ^{SS}	5	8	85	60	1,5	2 (+1/-1)	2 (+1/-1)	jakákoliv ¹			

¹ Jakékoliv zatížení povolené na podlahu.

Materiál profilů:

^{AL} Hliník^{SS} Nerezová ocel