



ZÁTĚŽOVÉ

ZD112



Šířka profilu
65 mm



Zapuštěná
montáž



Maximální zatížení
600 kN




Pohyb v
3 směrech



Stupeň ochrany
IP 30



Interiér/
exteriér

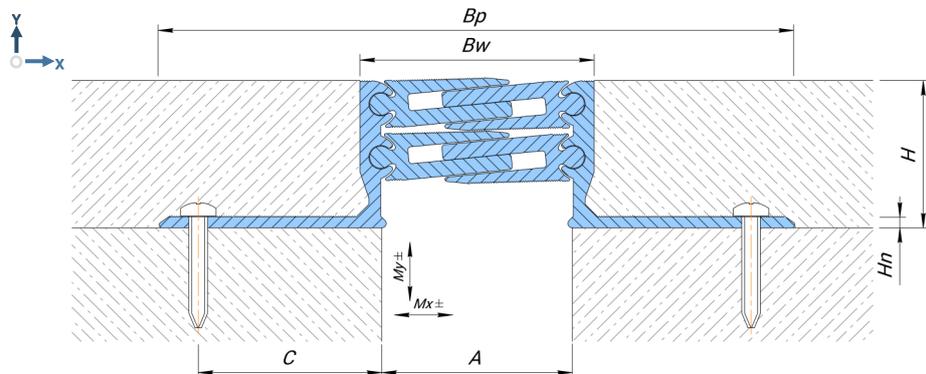

Technická data

Materiál

Hliník EN AW 6060T6

Délka

3 m

Standardní barva (RAL)

stříbrně bílá

Profil	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Únosnost (kN)			
ZD112-100	65	80	220	34	3	60	24 (+12/-12)	20 (+10/-10)	50 ¹	600 ¹	100 ¹	30 ¹
ZD112-101	65	80	215	50	4	60	24 (+12/-12)	20 (+10/-10)	50	600	100	30
ZD112-102	65	80	215	80	4	60	24 (+12/-12)	20 (+10/-10)	50	600	100	30

¹ Není určeno pro trvalé použití (vyžaduje koordinaci) - riziko poškození vrchní vrstvy.

Na vyžádání

Další výšky profilů na vyžádání.

Ochranné eloxování profilu